

NT5

Compact 1/2" Cardioid Condenser Microphone

RØDE[®]
MICROPHONES




Features

- Externally biased condenser
- Gold splattered 1/2" capsule
- Heavy-duty satin-nickel plated body
- Dual power operation
- Surface mount circuitry
- Low noise
- Full frequency response
- Available as Certified Match Pair
- Designed and manufactured in Australia
- Full 10 year warranty*


Specifications

Acoustic Principle	Pressure gradient	Directional Pattern	Cardioid
Frequency Range	20 Hz-20 kHz	Sensitivity	-38 dB re 1 Volt/Pascal (12 mV @ 94 dB SPL) +/- 2 dB @ 1kHz
Output Impedence	100Ω	Dimensions	Length - 118mm (4.6456") Diameter - 20mm (0.7874")
Output Connection	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground)	Shipping Weight	Single - 350g Matched Pair - 1.54kg
Net Weight	101g		

Frequency Response

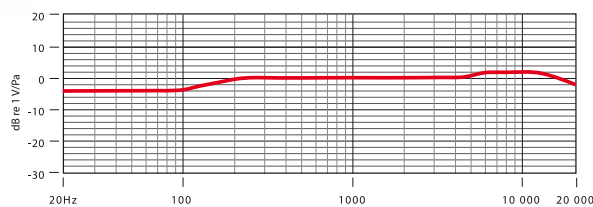

Polar Pattern

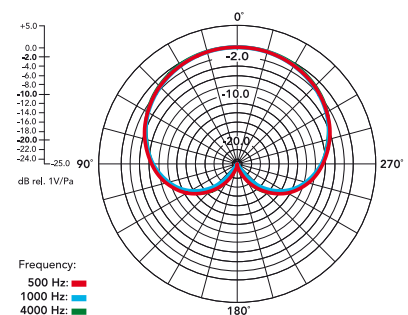

Included Accessories

- Single - RM5 stand mount, ZP1 zip pouch and WS5 windshield
- Matched Pair - 2 x RM5 stand mount, RC5 case and 2 x WS5 windshield



www.rodemic.com

*After online registration

Australia
107 Carnarvon st, Silverwater NSW 2128 Australia
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA
PO Box 4189 Santa Barbara CA 93140 USA
Ph: +1 805 566 7777 Fx: +1 805 566 0071